

...NEW THREAD

HALDER

Erwin Halder KG
Erwin-Halder-Straße 5-9
88480 Achstetten - Bronnen
Germany

T +49 7392 7009 - 0
F +49 7392 7009 - 160
info@halder.com
www.halder.com

MADE IN GERMANY.


HALDER

ORANGE IS THE

THREADED LIFTING PINS AND LIFTING PINS

EASY – FAST – ROBUST AND SAFE...

LIFTING DEVICES




INSERTING INSTEAD OF SCREWING

Eye bolts and other carrying elements have to be screwed in in a time-consuming way. Threaded lifting pins, on the other hand, can be inserted into existing threads at the push of a button and thus save an enormous amount of time when handling a wide variety of loads. A selection of different versions offers the right solution for every application.



EN/1000/08.23

www.halder.com

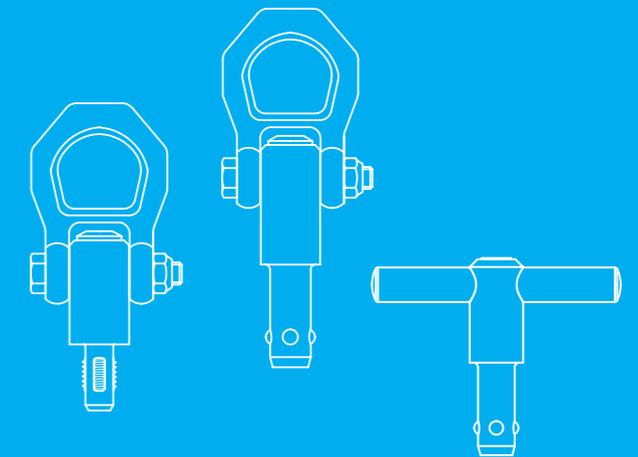

Aside from delivering an exceptional lifting capacity, our lifting pins require next to no effort as they are in no need of a thread. Better still, they ensure maximum safety during use.

The variant with manual handle allows easy, safe and reliable manual lifting and transport of unhandy components.

OUR PRODUCT RANGE

LIFTING PINS

Lifting Pins • self-locking

EH 22350.



- Heavy-duty lifting element with moveable shackle
- Corrosion resistant
- Extreme load capacity
- Temperature range up to 250 °C

**UP TO 1.000 KG
LIFTING CAPACITY**



ADVANTAGES

Lifting Pins, self-locking:

- Self-alignment of the shackle in the direction of force
- Quick assembly through simply plugging in
- Simple borehole is sufficient for use
- Money-saving through multiple use
- By using a suitable bushing, also usable in soft and thin-walled materials

Lifting Pins • self-locking, with handle

EH 22351.



- The T-handled grip can be used to move or transport workpieces via hand
- Corrosion and weather-resistant, thus also suitable for outdoor application
- High-strength, precipitation-hardened pin with an extreme load capacity
- Temperature range up to 250 °C



LOCATING BUSHINGS

Locating Bushings • for lifting pins

EH 22350.



- Used for quick and safe locating of lifting pins
- Corrosion and abrasion resistant
- Easily incorporated into different material
- Can be mounted in blind holes
- For thin-walled parts, lock nuts are used for assembly

Locating Bushings, plain • for lifting pins

EH 22350.



- Used for quick and safe locating of lifting pins
- This design is suitable for applications which require installation flush to the surface
- Corrosion and abrasion resistant
- Easily incorporated into different material
- Can be mounted in blind holes
- For thin-walled parts, lock nuts are used for assembly

Locating Bushings with Seal, plain • for lifting pins

EH 22350.



- Used for quick and safe locating of lifting pins
- The seal prevents the penetration of liquid and dirt
- This design is suitable for applications which require installation flush to the surface
- Corrosion and abrasion resistant
- Easily incorporated into different material
- Can be mounted in blind holes
- For thin-walled parts, lock nuts are used for assembly

THREADED LIFTING PINS

Threaded Lifting Pins • self-locking

EH 22352.



- Heavy-duty lifting element with moveable shackle
- For quick and easy use
- With locking stud to prevent unintentional unlocking
- Corrosion resistant
- Extreme load capacity
- Temperature range up to 250 °C
- Also available in INCH



**UP TO 4.200 KG
LIFTING CAPACITY**

Threaded Lifting Pins • self-locking, for centre holes according to DIN 332

EH 22352.



- Heavy-duty lifting element with moveable shackle
- For use in a threaded hole with counterbore according to DIN 332
- For quick and easy use
- With locking stud to prevent unintentional unlocking
- Corrosion resistant
- Extreme load capacity
- Temperature range up to 250 °C



**UP TO 2.300 KG
LIFTING CAPACITY**

Threaded Lifting Pins • self-locking, with rotatable shackle

EH 22353.



- Heavy-duty lifting element with moveable and rotatable shackle
- Self-alignment of the shackle in the direction of force
- For quick and easy use
- With locking stud to prevent unintentional unlocking
- Corrosion resistant
- Extreme load capacity
- Temperature range up to 250 °C
- Also available in INCH



**UP TO 1.800 KG
LIFTING CAPACITY**

ADVANTAGES

Threaded Lifting Pins, self-locking:

- Direct use in thread
- No additional bushings for use in the thread required
- 85 % time saving during assembly or disassembly compared to eyebolts



<https://www.halder.com/LiftingDevices>